




Ford Motor Company

VEHICLE EMISSION CONTROL INFORMATION

DRIVE BELT INSTALLATION

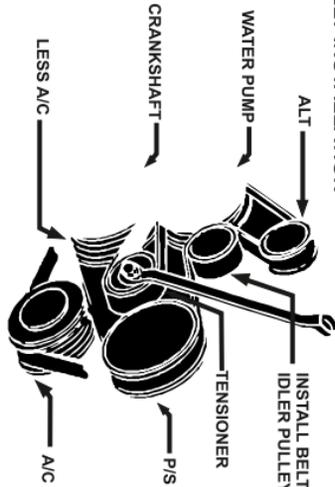

This vehicle is equipped with EEC-IV, EFI systems. Engine idle speed, idle mixture, and ignition timing are not adjustable. See Engine/Emissions Diagnosis Shop Manual for additional information.


To check engine timing set parking brake and block wheels. Engine must be at normal operating temperature, transmission in neutral, and accessories off

- (1) Turn off engine.
- (2) Disconnect the in-line Spout Connector (≡□□).
- (3) Re-start previously warmed-up engine.
- (4) Verify that the ignition timing is 10° BTDC. If not see shop manual.
- (5) Turn engine off and restore electrical connection.

Use SAE 5W-30 AMERICAN PETROLEUM INSTITUTE CERTIFIED OILS for GASOLINE ENGINES.

This vehicle conforms to U.S. EPA regulations applicable to 1995 model year new motor vehicles.

VACUUM HOSE ROUTING

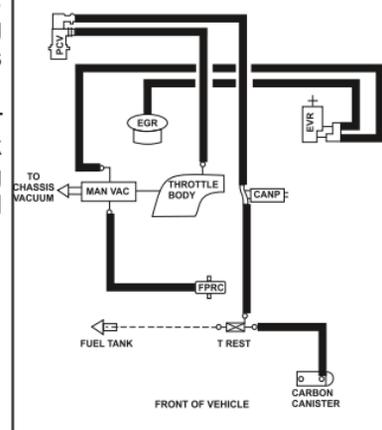

30V8GFEC

Spark Plug: AWSF - 32P

Gap: 042 - 046

3.0L - SFM1045AYM0A

SFM3.0V8GFEA - 2TWC/2HO2S/EGR/SFI

Catalyst

F5AE-9C485

LHP

TAURUS SEDAN LX 3.0 1995