




Ford Motor Company

VEHICLE EMISSION CONTROL INFORMATION

DRIVE BELT INSTALLATION

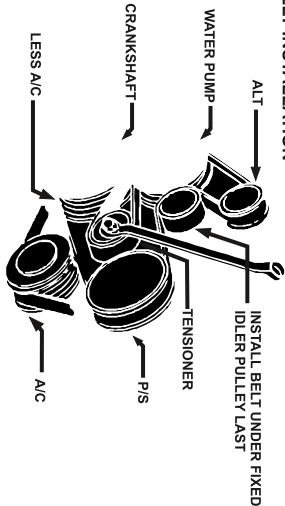


This vehicle is equipped with EEC-IV, EFI systems. Engine idle speed, idle mixture, and ignition timing are not adjustable. See Engine/Emissions Diagnosis Shop Manual for additional information.

To check engine timing set parking brake and block wheels. Engine must be at normal operating temperature, transmission in neutral, and accessories off

- (1) Turn off engine.
- (2) Disconnect the in-line Spout Connector (≡□□).
- (3) Re-start previously warmed-up engine.
- (4) Verify that the ignition timing is 10° BTDC. If not see shop manual.
- (5) Turn engine off and restore electrical connection.

USE SAE 20W-40 OIL API CATEGORY
SF, SF/CC, SG OR SF/CD.

VACUUM HOSE ROUTING

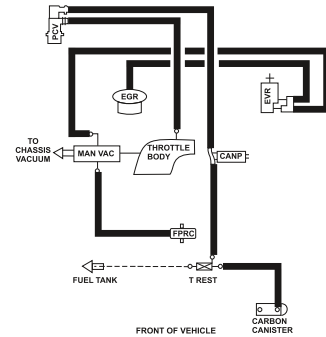

Spark Plug: AWSF - 32P
3.0L

Gap: 042 - 046

F4AE-9C485

K S H